

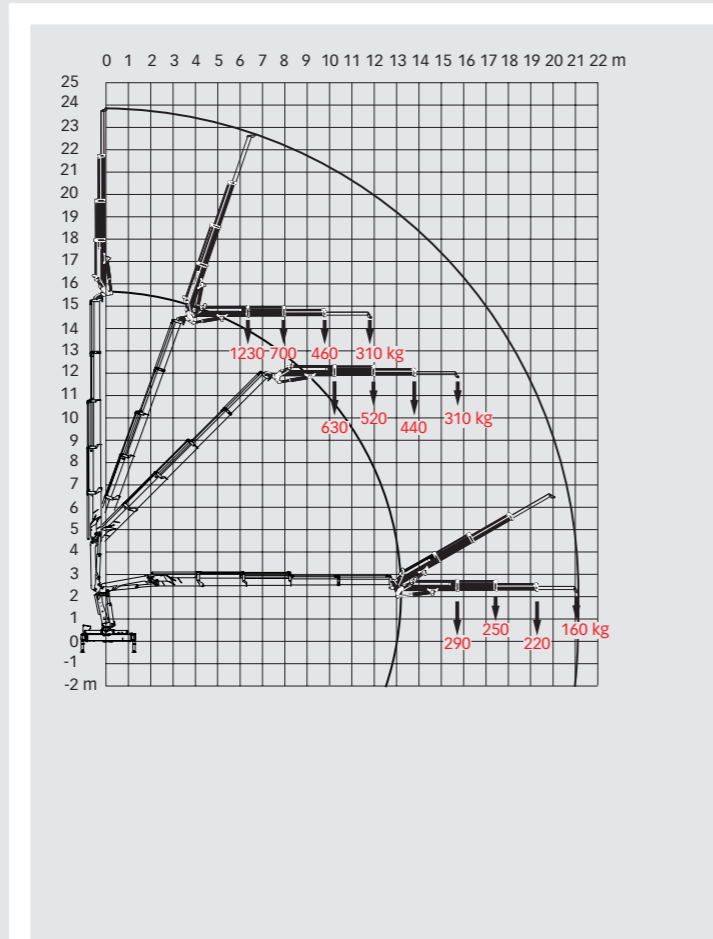
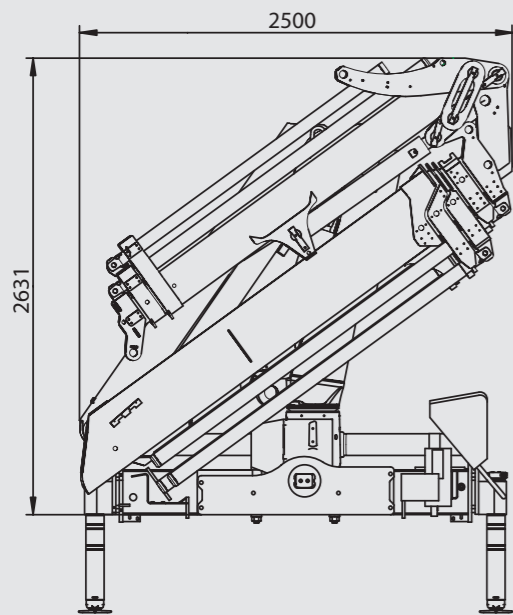


# HIAB XS 144 Basic data

## > HIAB XS 144 E-4 HiPro jib 45X-2

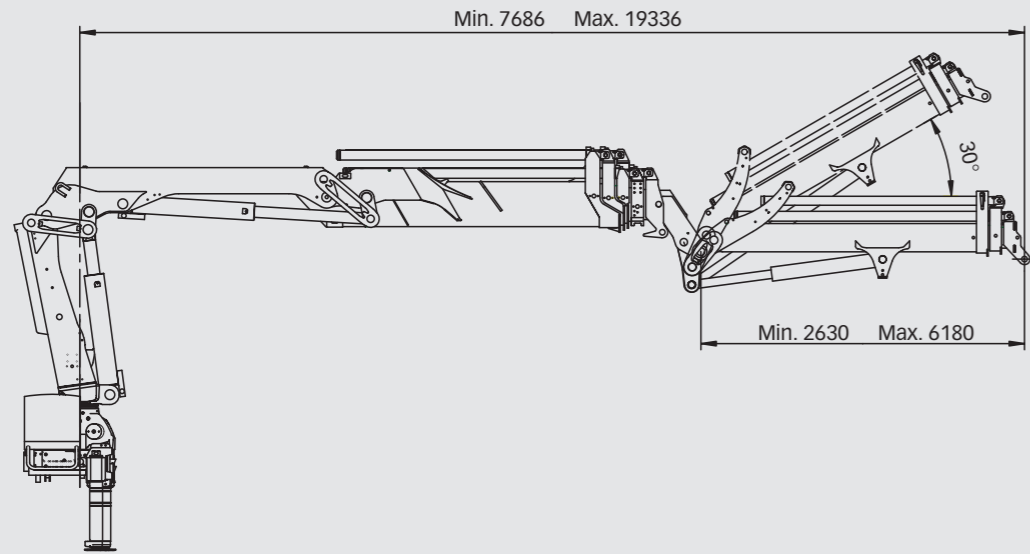

# HIAB XS 144 Range 11-14 tm

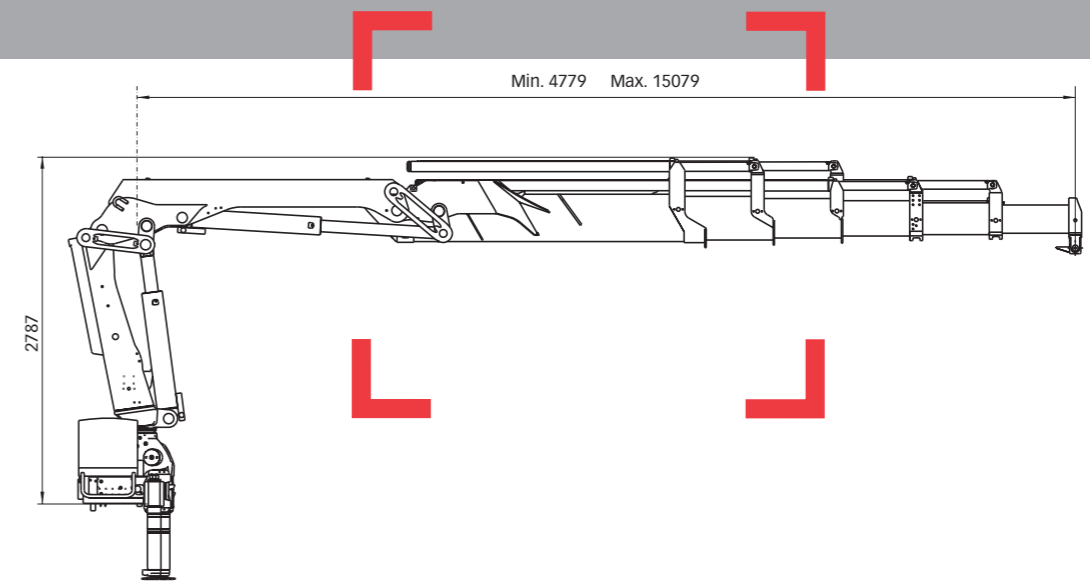

Basic data

### Disclaimer

Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations have been carried out in accordance with prEN 13001, in fatigue class S3. Hiab's certified Quality Assurance System complies with the ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.

BD-144-EN-EU/04/1012

[www.hiab.com](http://www.hiab.com)



# HIAB XS 144 Basic data

## Technical data

	B-3 CL	B-3 Duo	E-5 HiDuo	ES-3 HiPro	E-4 HiPro	E-5 HiPro
Max. lifting capacity (kNm)	115	119	115	127	120	118
Outreach - hydraulic extensions (m)	10.6	10.6	15.1	10.2	12.8	15.1
Outreach - manual extensions (m)	12.8	-	17.4	-	17.4	-
Outreach - jib (m)	-	-	-	-	19.3	-
Outreach / lifting capacity (m / kg)	3.0 / 3900	3.1 / 4300	2.6 / 5000	2.3 / 6000	2.5 / 5300	2.6 / 5000
	4.5 / 2600	4.5 / 2900	4.8 / 2700	4.3 / 3300	4.7 / 3000	4.8 / 2800
	6.3 / 1840	6.3 / 2000	6.6 / 1860	6.1 / 2300	6.5 / 2000	6.6 / 1920
	8.3 / 1360	8.2 / 1540	8.5 / 1340	8.0 / 1700	8.4 / 1500	8.5 / 1400
	10.3 / 1080	10.3 / 1200	10.6 / 1020	10.1 / 1340	10.5 / 1160	10.6 / 1060
Outreach / lifting capacity, with jib (m / kg)	-	-	12.8 / 820	-	12.7 / 940	12.8 / 860
	-	-	15.0 / 680	-	-	15.0 / 720
	-	-	-	-	15.7 / 290	-
	-	-	-	-	17.4 / 250	-
	-	-	-	-	19.3 / 220	-
Slewing angle	415°	415°	415°	415°	415°	415°
Height in folded position (mm)	2233	2233	2301	2632	2631	2301
Width in folded position (mm)	2500	2500	2500	2500	2500	2500
Installation space needed (mm)	861	861	855	854	770	855
Weight - "standard" crane without stabilizers (kg)	1660	1660	2130	1970	2080	2190
Weight - stabilizer equipment (kg)	195 - 366	230 - 371	230 - 371	230 - 371	230 - 371	230 - 371
Weight - jib (kg)	-	-	-	-	380	-

## HIAB XS 144 E-5 HiPro

