


MULTILIFT XR18Z

XR POWER RANGE HOOKLIFTS



Technical data

Type	XR18Z					
Vehicle type	3 axle					
GVW of the vehicle (t)	26					
Capacity (t)	18					
G-length	46	51	53	56	59	61
System weight (kg) *	2280	2360	2410	2460	2520	2600
Tipping angle (°)	50	52	49	49	52	49
Max. operating pressure (MPa)	30					
Recommended oil flow (l/min)	80					

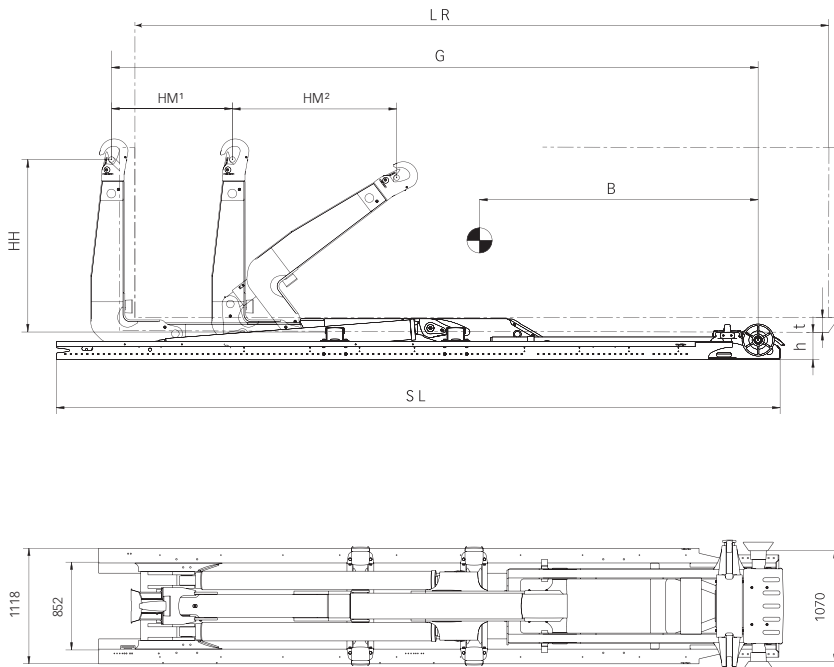


* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab MULTILIFT dealer.

*** Other hook heights for different body standards available.

Hiab MULTILIFT equipments meet the demands set forth in the EU Machine Directive and they are CE marked. We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

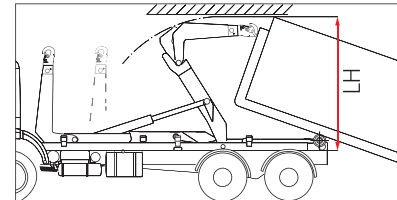

Primary dimensions

Model	XR18Z.46	XR18Z.51	XR18Z.53	XR18Z.56	XR18Z.59	XR18Z.61
LR = Body length (m) (min – max) INTERNAL	3.0 - 5.6	3.2 - 6.1	3.5 - 6.3	3.8 - 6.6	4.0 - 6.9	4.3 - 7.1
SL = Subframe length (mm) **	5273	5753	5983	6283	6553	6783
B = Centre of gravity (mm)	2500	2850	2900	3000	3300	3600
G = Exact G-length (mm)	4600	5080	5310	5610	5880	6110
LH = Min. operation height (mm)	2544	2720	2720	2800	3066	3066
HM = Horizontal movement HM ¹ +HM ² (mm)	800 + 1250	1100 + 1250				
t = Min free tunnel height (body) (mm)	125					
h = Installation height (mm)	250					
HH = Hook height (mm) ***	1570					

Sales contact