

**EXTENDO 1258<sub>X</sub>**

**PETTIBONE**


# 1258<sub>X</sub> **EXTENDO**

The Extendo™ 1258X takes rugged Pettibone® performance to another level, offering up to 12,000 pounds of lift capacity and a maximum lift height of 58 feet, 6 inches. Featuring a 4-section boom, standard outriggers and user-friendly hydraulic controls, the Extendo 1258X is the ultimate telehandler for tough jobsites.

**X-SERIES**



# SPECIFICATIONS

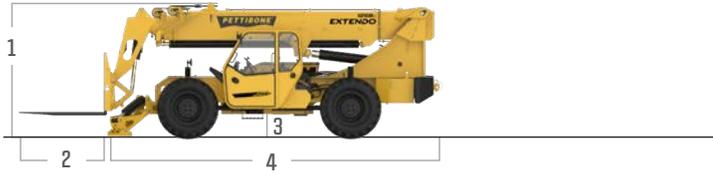

## DIMENSIONS

1	<b>Overall Height</b>	9' (274 cm) boom down
2	<b>Fork Carriage</b>	48" (122 cm) standard
3	<b>Ground Clearance</b>	19" (48 cm)
4	<b>Overall Length</b>	22' 11" (699 cm) to fork frame
	<b>Overall Width</b>	8' 6" (259 cm)
	<b>Pallet Forks</b>	2.25x4x48" standard
	<b>Approximate Operating Weight</b>	32,250 lbs (14,628 kg) with outriggers

## ENGINE

<b>Model/Power</b>	117 HP (87 kW) Cummins® QSF3.8 Tier 4 turbo diesel with DEF and SCR aftertreatment
<b>DEF Tank</b>	5 gal. (19 L)
<b>Fuel Tank</b>	30 gal. (114 L)

## HYDRAULICS


<b>System</b>	Pressure comp, axial piston pump
<b>Features</b>	Fully proportional functions, auxiliary boom tip hydraulics, quick disconnect for attachments
<b>Controls</b>	Single joystick, pilot operated

## PERFORMANCE


<b>Max Load Capacity</b>	12,000 lbs (5,443 kg)
<b>Maximum Lift Height</b>	58' 6" (1,783 cm)
<b>Landing Height</b>	55' (1,676 cm)
<b>Maximum Forward Reach</b>	42' (1,280 cm) at 24" LC
<b>Below Grade Reach</b>	3' 2" (97 cm)
<b>Maximum Travel Speed</b>	15.2 mph (24.5 km/h)
<b>Turning Radius</b>	14' 4" (437 cm)
<b>Drawbar Pull (GVW)</b>	31,600 lbs (14,334 kg)
<b>Frame</b>	20° of leveling (10° right and left), rear axle stabilization system
<b>Transmission</b>	Dana® VDT12000 Series, 3-speed Powershift, forward & reverse
<b>Axles</b>	Dana 223 Series: 4-wheel drive, 45% limited slip front differential
<b>Steering</b>	4 wheel, 2 wheel, and crab steer
<b>Brakes</b>	Oil-immersed inboard disc service brakes, integral front SAHR park brake
<b>Tires</b>	14.00 x 24, 16 ply, G2 tread air-fill standard
<b>Boom</b>	4-section, slide pad; automatic fork leveling without slave cylinder

# LIFT PERFORMANCE

Standard Fork Frame  
(Outriggers Up)

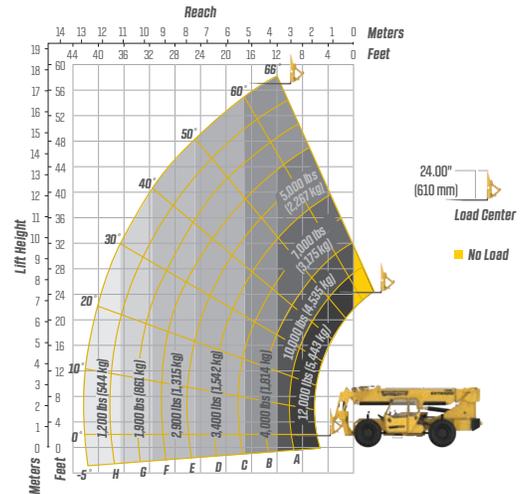

Standard Fork Frame  
(Outriggers Down)

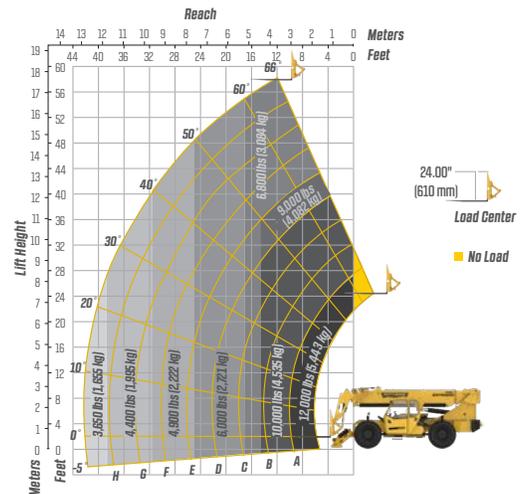

# FEATURES & OPTIONS

## OPERATOR CAB

Adjustable suspension seat with seat belt	Split door design
Single multifunction hydraulic joystick	Flat, bolt-in glass
Analog/LCD gauge cluster	Lockable storage area under seat

## AVAILABLE ATTACHMENTS

Pallet, lumber or block forks	Standard carriage
Utility bucket	Side-swing carriage (+/- 60°)
Side tilt carriage (+/- 10°)	Hydraulic fork positioning carriage
Truss boom	10' tower w/ standard carriage

## OPTIONS

Premium gauge cluster w/7" digital display	Enclosed cab, HWD (A/C available)
Rear-view camera system	Sling hook
High output LED lighting package	Electrical to boom tip
Solid or foam filled tires	Bolt-on rear pintle hitch
Various tire tread options available	

\* Specifications are subject to change.

**PETTIBONE®**

## PETTIBONE, LLC

1100 Superior Avenue  
Baraga, MI 49908

P: 800.467.3884  
info@gopettibone.com  
www.gopettibone.com

**1-2-3  
WARRANTY**

<b>1 Year</b>	Full machine and attachment
<b>2 Years</b>	Powertrain and major hydraulic components
<b>3 Years</b>	Machine structure

# WARRANTY